


Cutout dimension see sheet
2, forces see sheet 3



*To be adapted on site
**Customized panel

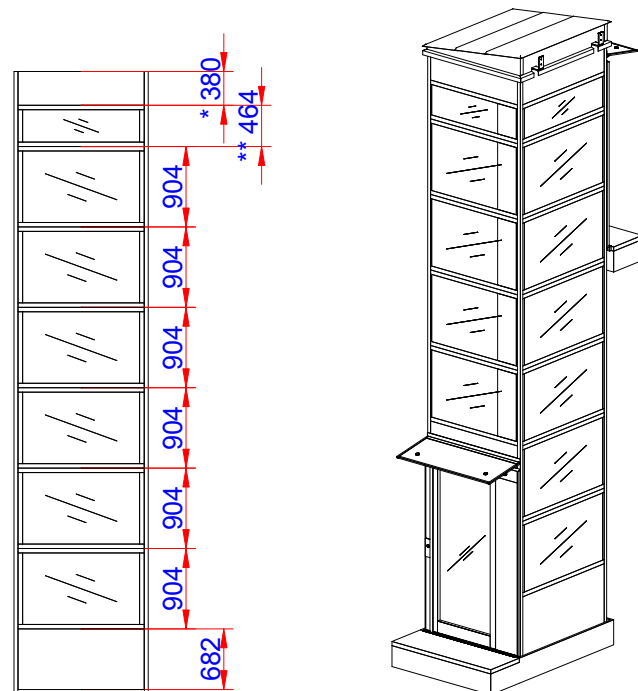


E

Positioning of machinery:

E=Shield wall

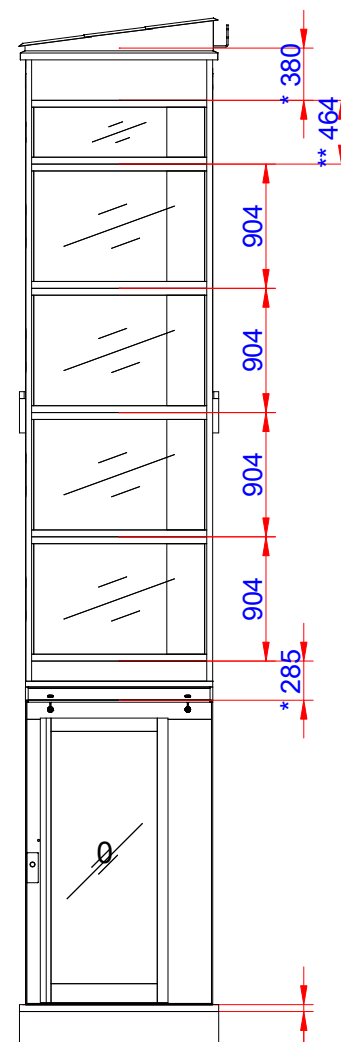


A

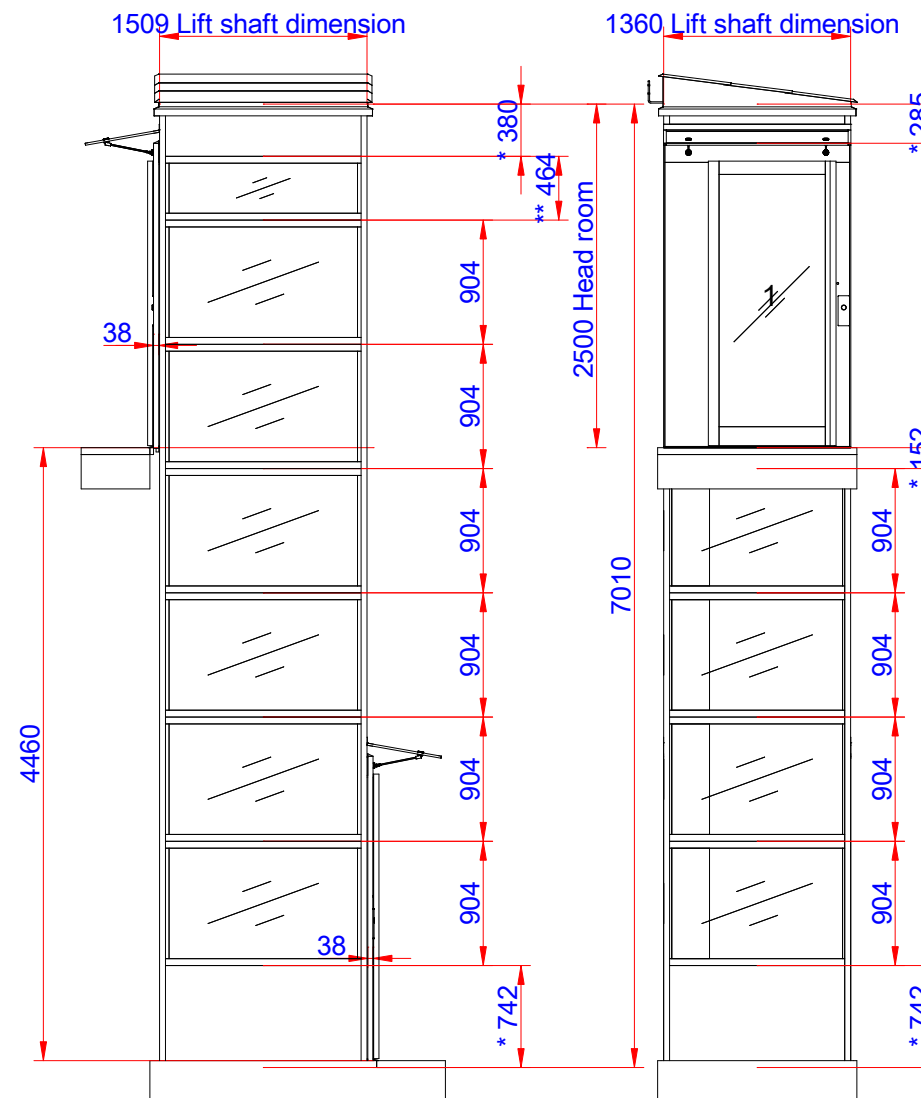

B



C

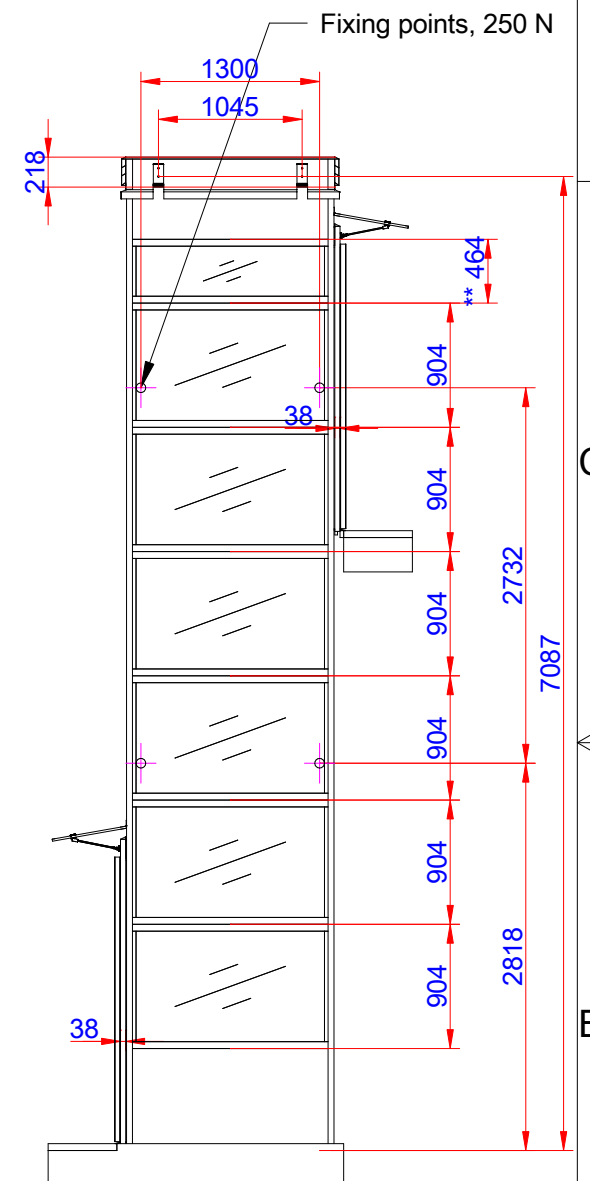




D

Options Frekv 1x230/240V 50-60Hz 16 A Soft Capacity: 400,00 kg	Approved by builder:	Cibės	EOS ID Tender no Order no	Principal drawing A5000 Outdoor Lift - 1000*1467 Shaft drawing		
	European view placement: 		Gen. Tolerances SS-ISO 27681-1 m	Date	sheet 1 of 6	Scale: A3, 1:85


Shaft cutout sizes

Clear space required for lift unit not in a shaft by others




Door front cutout sizes		
Landing	Width	Height
A 0	1400	2250
C 1	1400	2250

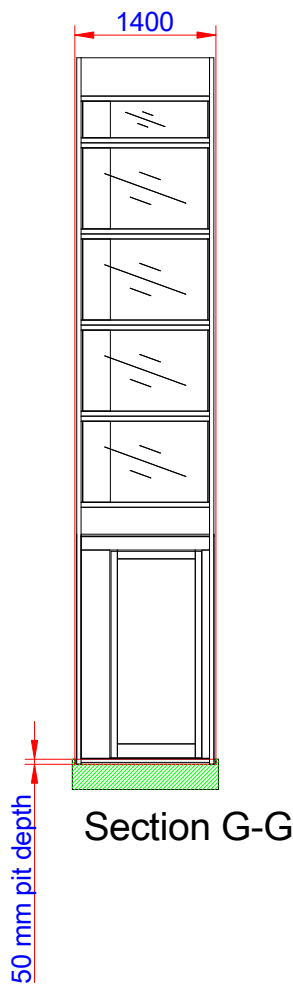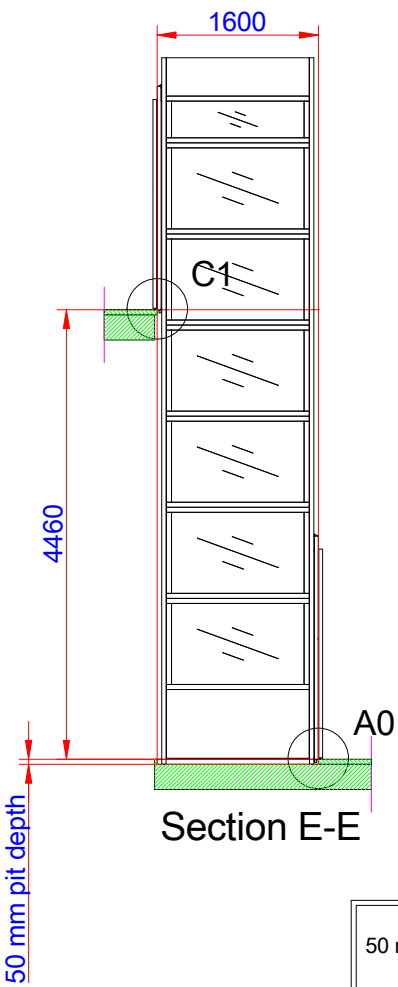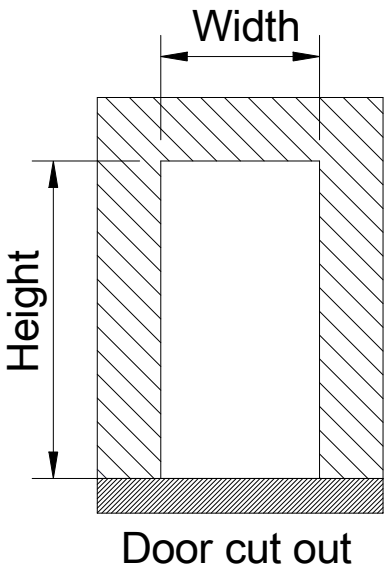

C1 (1:5)

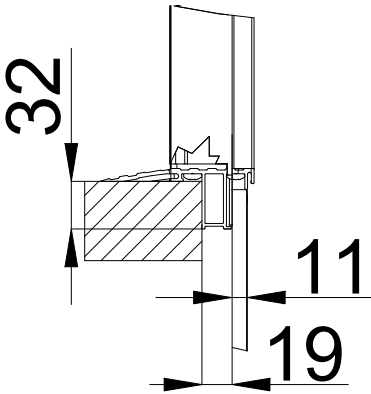

A0 (1:5)

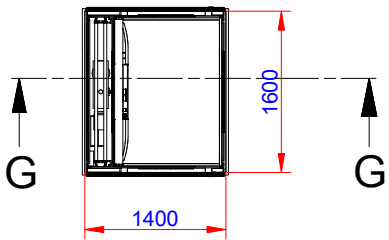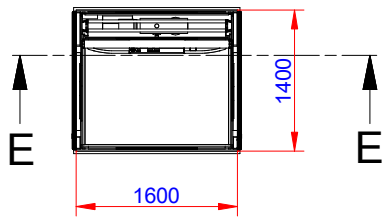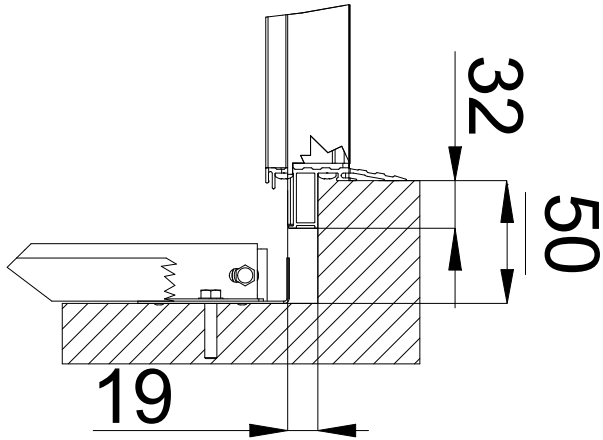

Approved by
builder:

European view placement:

EOS ID

Tender no

Order no

Gen. Tolerances
SS-ISO 27681-1 m

Date

sheet
2 of 6


Scale:
A3, 1:85

Principal drawing
A5000 Outdoor Lift - 1000*1467
Cut out sizes

Loads sustained by shaft and platform
and fixing points bottom frame



L section force: 10,22
kN
L section load: 33,51
kN/m²
Weight on L-section
area: 1022 kg

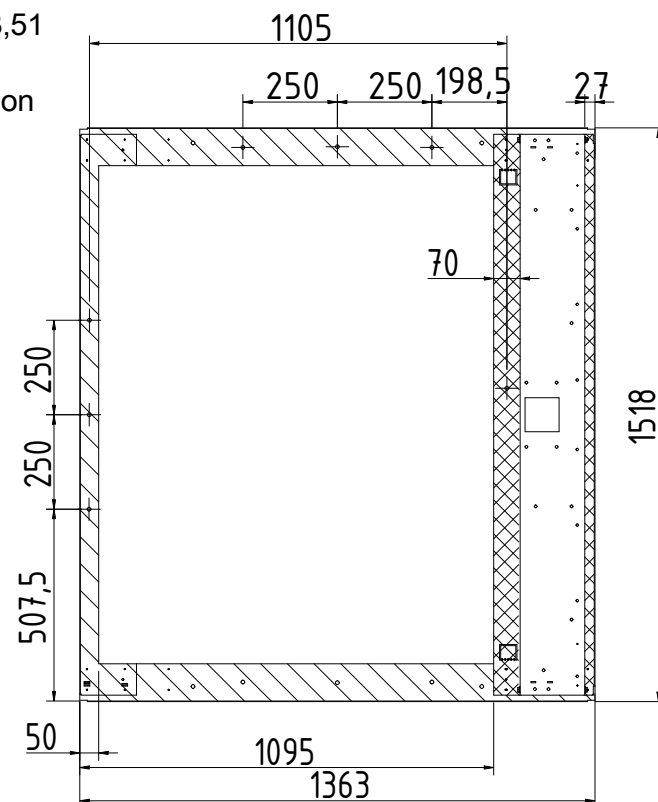


Scale: 1:20

Total weight of the lift equipment
(including rated load): 1803 kg

Recommended positioning of fixing points.
Loads per fixing point, F=5600 N





Mast force: 7,31 kN
Mast load: 58,95 kN/m²
Weight on mast area: 731 kg

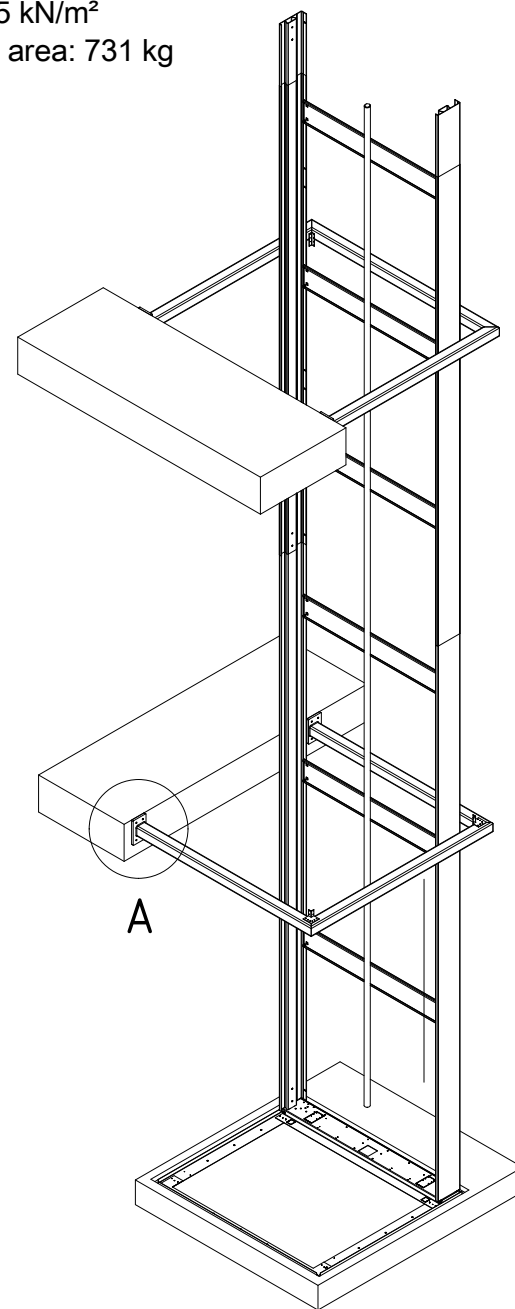

General view

A (1 : 5)

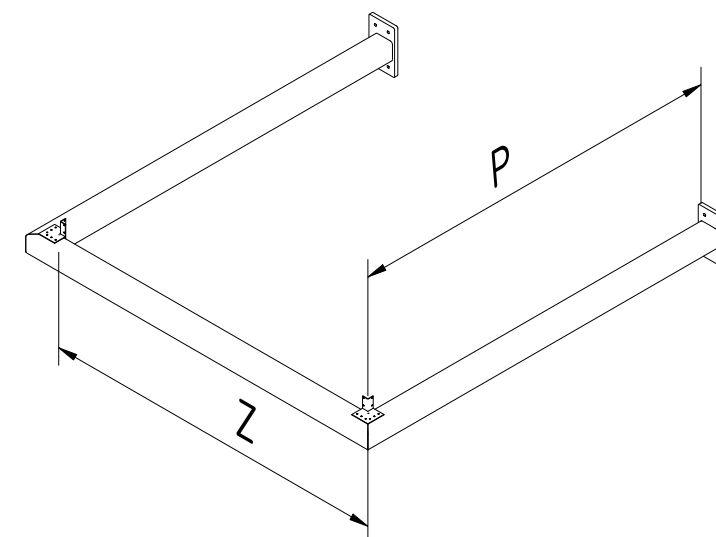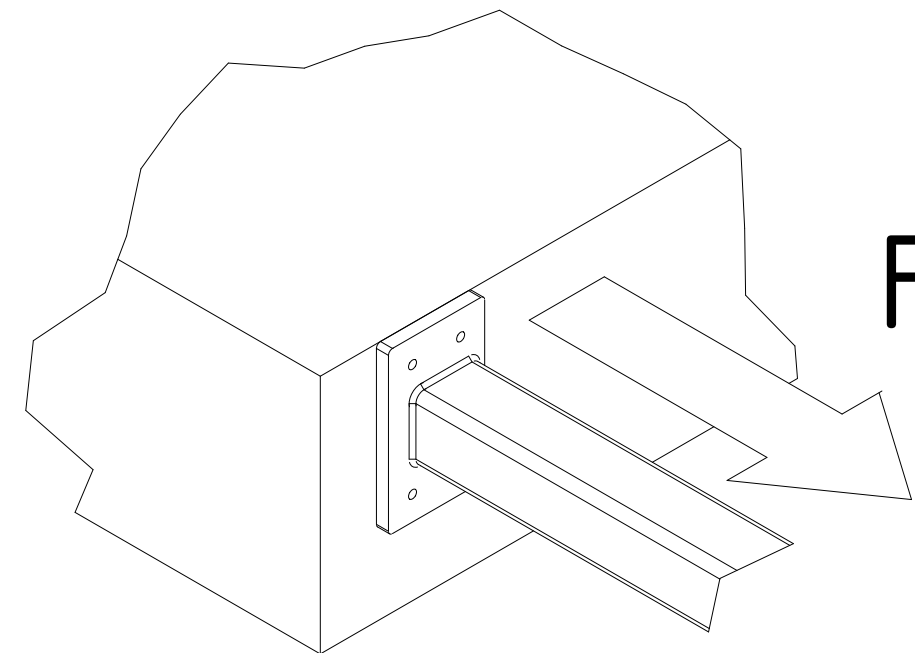

U-bracket				
Open side	QTY	Reinforced	Z	P
A/C	2	true	1440	1560

Free height of the lift shaft may not exceed 2.5 m.
Distance between two support brackets or between
ground and support bracket may not exceed 5.0 m.

Approved by
builder:

European view placement:



Cibăș

EOS ID

Tender no

Order no

Gen. Tolerances

SS-ISO 27681-1 m

Principal drawing

A5000 Outdoor Lift - 1000*1467
Loads and forces

Date

sheet

3 of 6

Scale:

A3, 1:85