


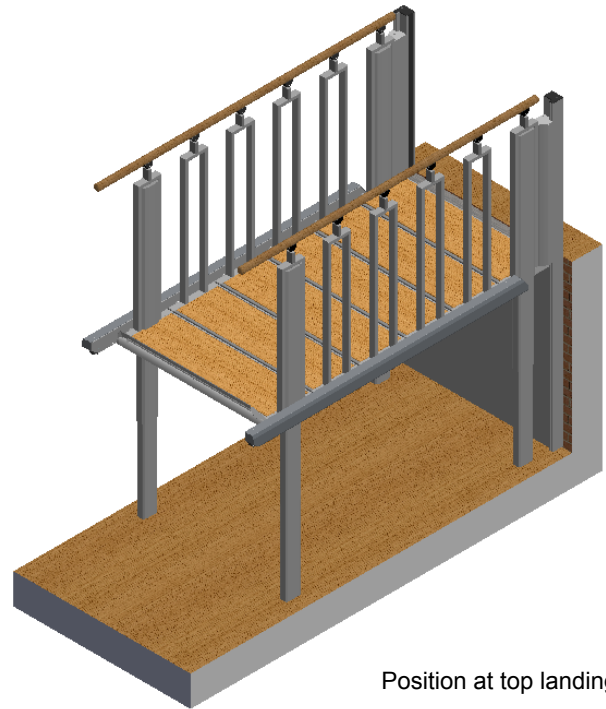


DETAIL A
SCALE 1 : 10

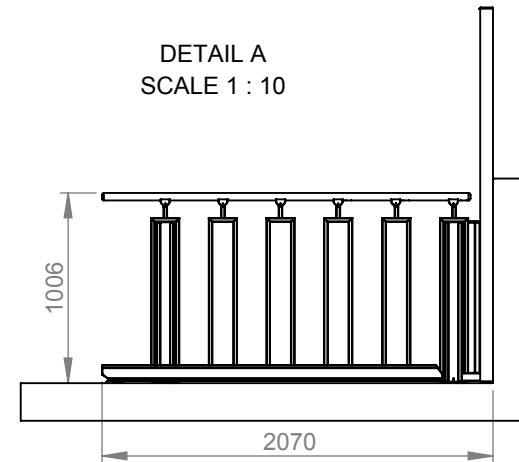


Minimum Installation Dimension
 1006 mm (model 700 mm)
 1106 mm (model 800 mm)
 1206 mm (model 900 mm)
 1306 mm (model 1000 mm)


Specs.	Choice	Model:	6 STEPS		
Installation	Indoor	Balustrade:	Square	Last change date: 28-10-2015	
Handrails	Oak	Lifting Capacity:	400 kg	Customer :	Product Name
Step Inserts	Oak	Drawn by:	MP		FLEXSTEP V2
Colour	Akzo Nobel 900				Scale: 1:40 A4
Packing	Carton or Wood Pallet Box				
Op. Panel					

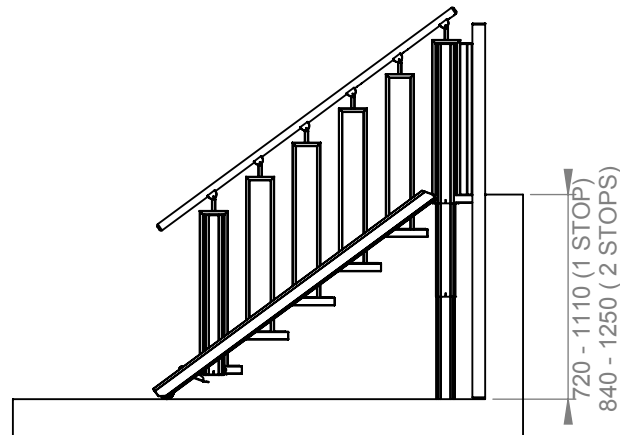

Position at top landing

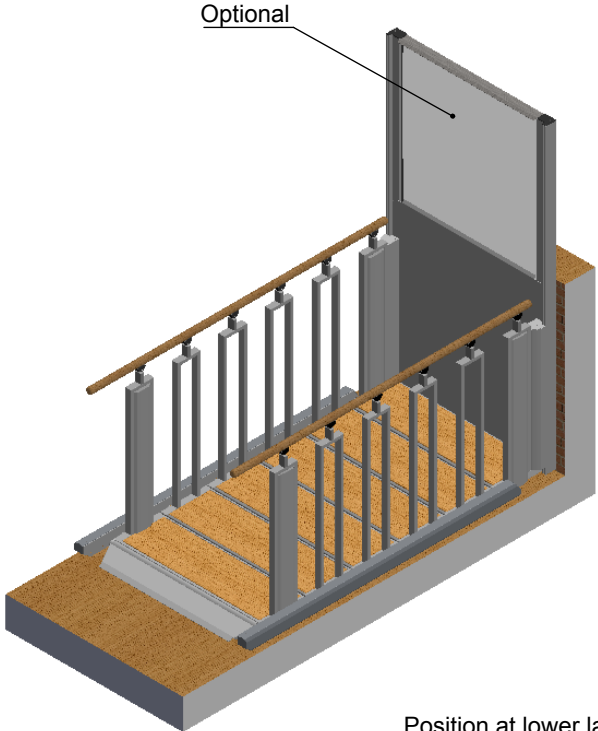

Position at lower landing

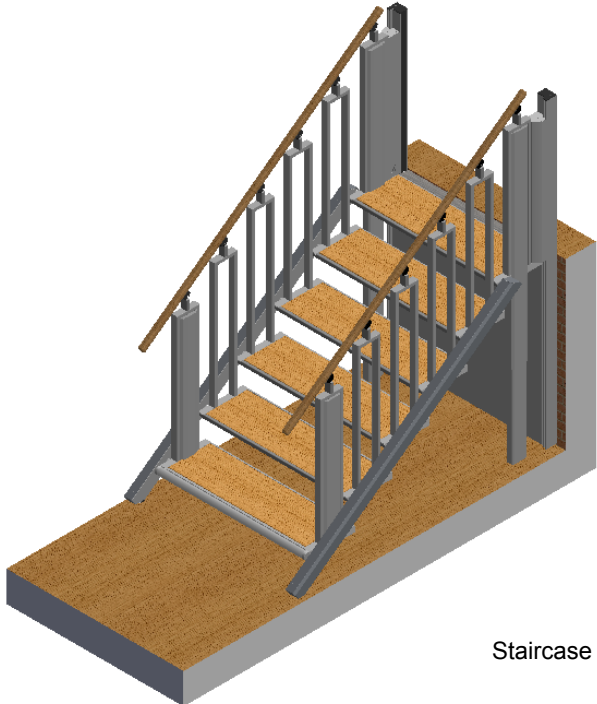

Staircase

Specs.	Choice	Model:	6 STEPS		
Installation	Indoor	Balustrade:	Square	Last change date: 28-10-2015	
Handrails	Oak	Lifting Capacity:	400 kg	Customer :	Product Name
Step Inserts	Oak	Drawn by:	MP		FLEXSTEP V2
Colour	Akzo Nobel 900				Scale: 1:35 A4
Packing	Carton or Wood Pallet Box				
Op. Panel					